


Profile Performance Chart

7/64" Nozzle @ 45 psi


Ideal spacing: 40 x 30 Tri

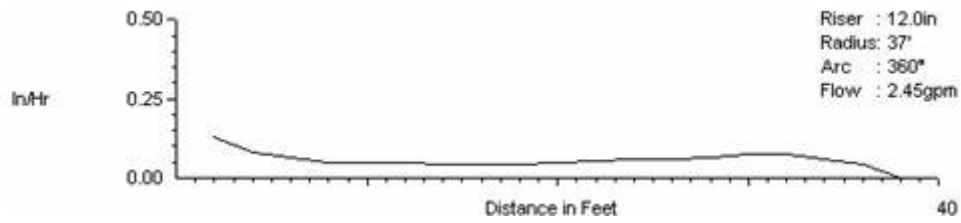

Spacing	CU	DU	Mean (In/Hr)
40.0 x 30.0 Tri	85	80	0.200
40.0 x 30.0 Rec	76	57	0.200

5.5" Single Slot @ 45 psi

Ideal spacing: 40 x 30 Tri

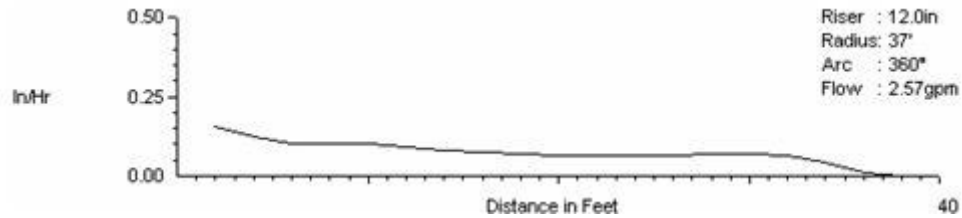

Spacing	CU	DU	Mean (In/Hr)
40.0 x 30.0 Tri	92	89	0.228
40.0 x 30.0 Rec	84	73	0.228